

Realizing dreams with a new fusion. The future is here.




We Deliver World Class Performance

UBE UBE MACHINERY CORPORATION, LTD.

1980 Okinoyama, Kogushi, Ube, Yamaguchi 755-8633 Japan
Tel: +81-836-22-0072 Fax: +81-836-22-6457
<http://www.ubemachinery.co.jp/english/>

UBE / UBE MACHINERY INC.

5700 S. State Road, Ann Arbor, MI 48108 USA
Tel: +1-734-741-7000
<http://www.ubemachinery.com>

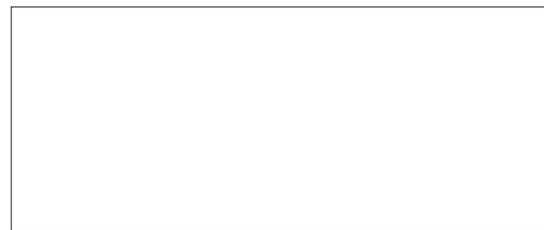

Specifications are subject to change without prior notice.



ALL ELECTRIC INJECTION MOULDING MACHINE


HH SERIES



“Dreams and Future”!

Our unlimited technology offers expanded moulding possibilities with the new HH (Double H) Series

The UM “HH Series” all electric injection moulding machines reflect the qualities of “Dreams and Future” and provide moulding possibilities based on reliable technologies

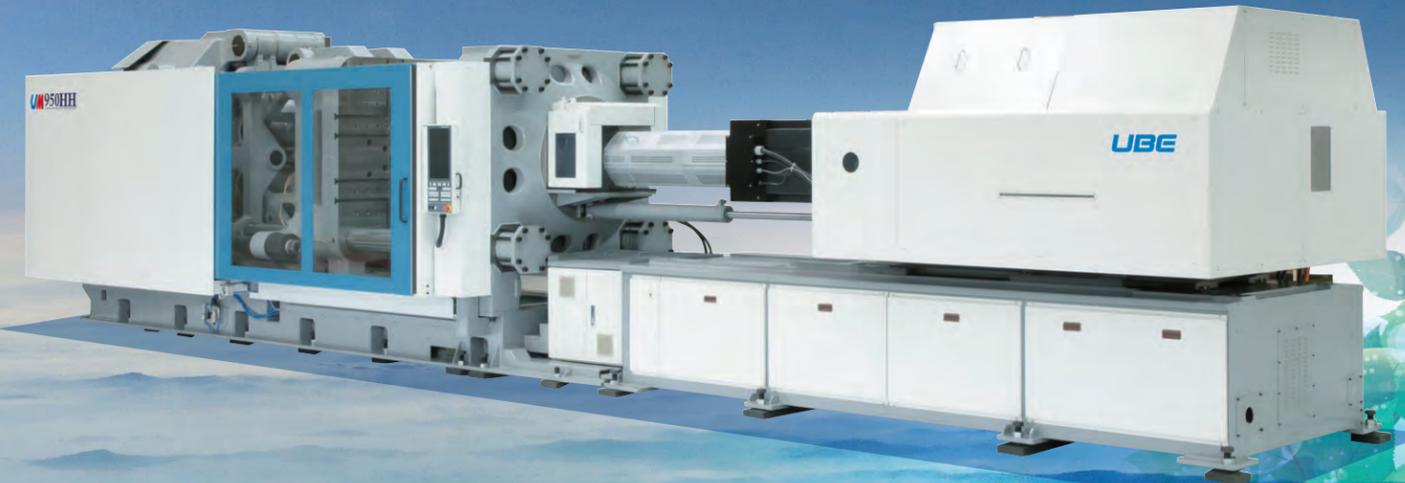

- New MAC-IX Controller “connecting to the Internet”
- UM IoT solutions
- Varied selection of screw sizes
- DIEPREST for improved functionality and moulding capabilities
- Direct Drive (DD) injection servomotors for fast response, high-powered injection
- Highly rigid, wide platens to realize precise moulding
- Highly reliable, long-life ball screws
- Electric regeneration system for carbon neutrality

Machine line-up of HH series

950HH

*The pictures shown in this catalog include optional equipment.

Clamp unit	Injection unit	Screw diameter	Injection speed
390HH	35	Standard: ϕ 2.44 in Inj. Boost: ϕ 2.25 in	U (11.8 in/sec) H (7.9 in/sec) S (5.9 in/sec)
500HH	50	Standard: ϕ 2.76 in Inj. Boost: ϕ 2.44 in	U (8.9 in/sec) H (6.3 in/sec) S (4.9 in/sec)
610HH	70	Standard: ϕ 3.15 in Inj. Boost: ϕ 2.76 in	H (6.3 in/sec) S (4.9 in/sec)
720HH	100	Standard: ϕ 3.54 in Inj. Boost: ϕ 3.15 in	H (6.3 in/sec) S (4.9 in/sec)
950HH	160	Inj. Increase: ϕ 4.53 in Standard: ϕ 4.13 in Inj. Boost: ϕ 3.54 in	H (6.3 in/sec)
950HHW	240	Inj. Increase: ϕ 5.20 in Standard: ϕ 4.73 in	H (4.9 in/sec)
1500HHW	340	Inj. Increase: ϕ 5.32 in Standard: ϕ 5.91 in	H (4.9 in/sec)

The new and improved MAC-IX Controller

- Exceptional operability with two separate screens implemented in large screens.
- An upgraded security function that uses ID card authentication is equipped as standard.
- Stable moulding by high-speed control that is six times that of a conventional system

Upgraded Operability

- **Pivoting mechanism, two separate large LCD screens**
Two screens are selectable as you choose, and allows for an unprecedented user-friendly operation environment.
- **Injection waveform memory**
Comparable to good item's waveform, and helpful for good producing.
- **Vertically long screen**
Long, vertical screens can display twice the trend data compared to a conventional system.


High Speed, Highly Accurate Control

- **Shortened scan time**
Scan time is shortened to a sixth of a conventional system by using EtherCAT® High-speed communication which provides for stable weight of the moulded product.

※EtherCAT® is a registered trademark of Beckhoff Automation GmbH.



Separated dual-screen control panel

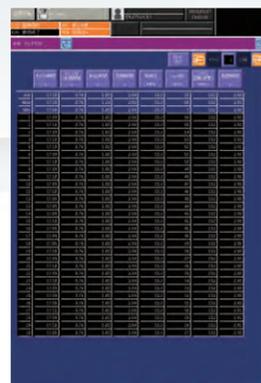

30shot-trend data is displayed by long screen layout.



Injection conditions can be changed while reviewing process records


Upgraded Security Function

- **Security ID card system**
Login by ID card which can be assigned to an operator.
Automatic change of languages and units
Prevention of password loss
- **Traceability management**
Operator's information is added to the operational/setting records
- **Control of operator access**
4 levels of access can be set for each operator.



User Support Function


- **Alarm guidance**
Actions for alarm resolution by using a flow chart which can be restored easily.
Easy identification of faults by improved alarm messages
- **Fault record function**
Input-output data both pre and post trouble is automatically stored to a large-capacity HDD, and helps to reduce the time for troubleshooting.
- **e-manual**
The machine manual is available for viewing on screen



Alarm guidance on screen

Global Reliability


- **An uninterruptable power supply (UPS) is standard equipment**
Prevents trouble caused by voltage drop or brownout, even in areas having an unstable electric power supply
Data can be safely backed-up in case of power outage
- **A surge suppressor is standard equipment**
Protects the control system from lightning strikes
- **Multi-language selection**
The standard languages available are Japanese, English, Chinese, Spanish, and Thai (new addition). Eight other languages are available as an option. A maximum of three languages is selectable from a total of 13 languages.
- **Pictographic switches (ISO-compliant)**
Easy to operate by pictographic switches
- **Various International Standard compliance**
Complies with JIMS, ANSI, EN, GB, and KCS standards.
- **IEC 61131-3-compliant ladder**
The operation sequence is created by global standard ladder language

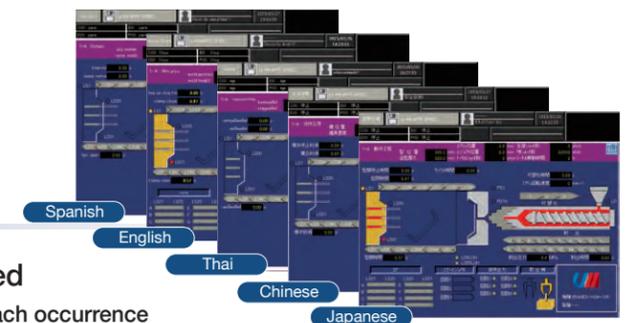

UM IoT solutions


UBE - FANUC SHOT-LINK*i*

Product and Quality information management for globalization of moulding facilities (connectable up to a maximum of 128 machines)

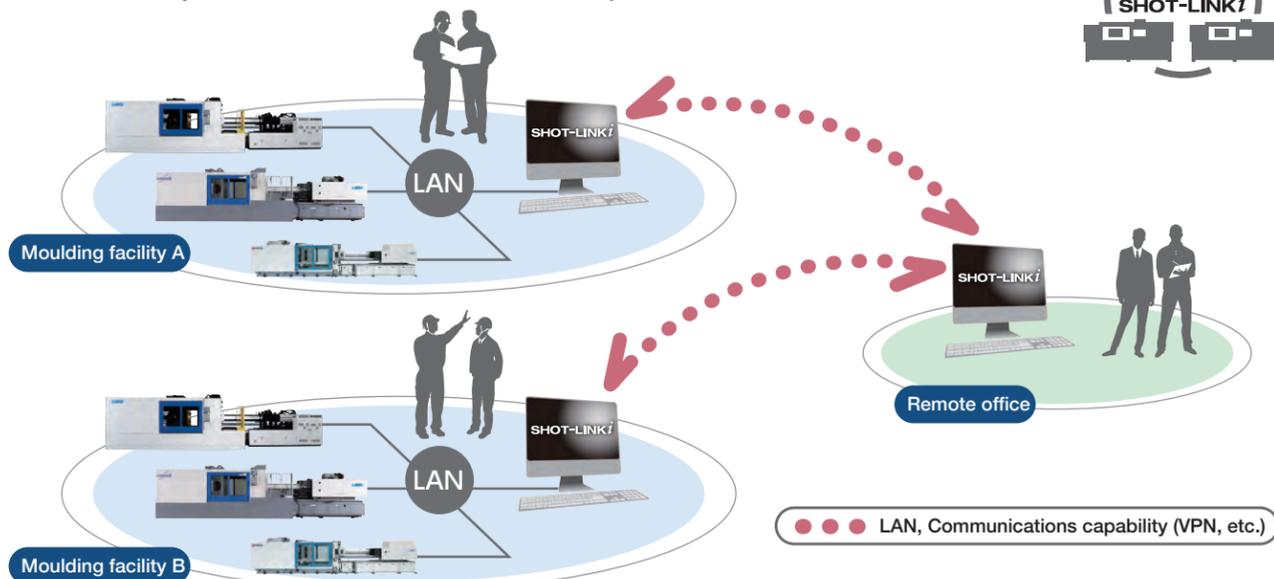

Production information for each machine is displayed


Able to classify and summarize alarm data from each machine for each occurrence

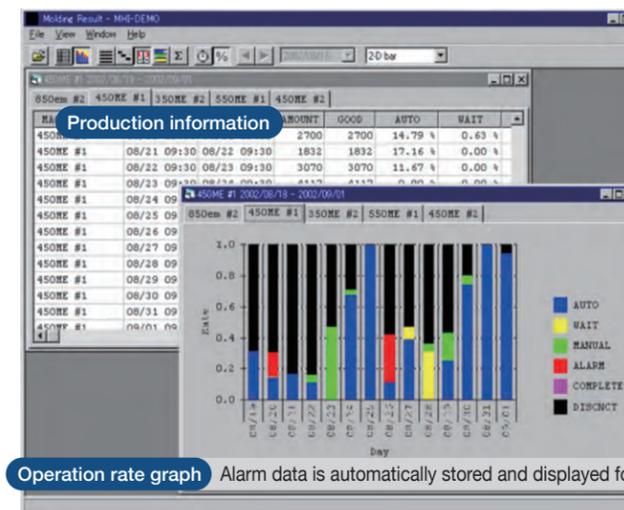

Analysis

Quality radar

Displays the correlation of the data

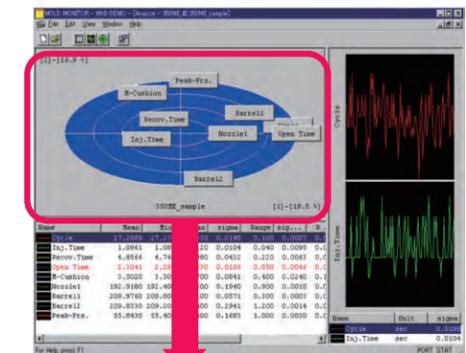

- Same place: Same correlation data
- Symmetrical to center point: Reversal correlation data
- Distance from center point: Variation impact is great.

Variety of screw sizes available


The highly regarded UB screw with outstanding mixing and plasticizing capacity properties is standard equipment. Various screw designs tailored to the wide-ranging needs of the industry are also available.

For high-cycle, general-purpose, "UB screw" (Standard equipment)	
For super-high color mixing, "MF-UB screw" (Optional)	
For Long Fiber Thermoplastics, "LFT screw" (Optional)	
For low shear, low heat generating, "F screw" (Optional)	
For high cycle, high mixing, "SP III screw" (Optional)	

High rigidity wide platen

Platen design is optimized for high rigidity

New 1500HHW model is added to the line up, and 720HH is standardized with a wide platen.

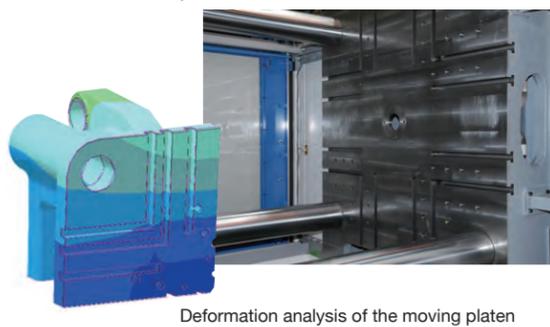

Deformation analysis of the moving platen

High-response, high-powered injection, dedicated DD Motor

Featuring high-powered AC servo motors developed with original power electronic technology specifically for injection moulding applications


The DD (Direct Drive) mechanism directly connects the injection drive ball screw and the motor, making thin-wall moulding possible by low inertia, highly responsive, and high acceleration/deceleration performance. Maintenance costs are reduced by the beltless mechanism, and thick-wall moulding, which needs longer holding pressure times is also possible. The benefits of the DD System are useful for a broad range of process conditions.



DD (Direct Drive) Motor


Highly reliable ball screw

The estimated ball screw service life is based on original long-term endurance testing. The surface pressure testing system and original overall structural analysis methods ensure long ball screw service life and lower maintenance cost.

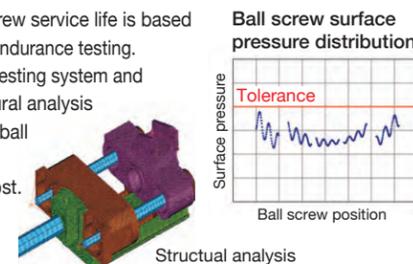

Electric regeneration system

During the braking phase of motion, the motors act as generators, and the generated power is converted to electric power for reuse by the system.

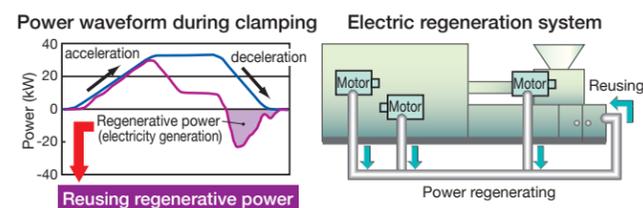

DIEPREST precise mould open/close control system (Optional)

The combination of precise multi-step mould open/close operation of the electric toggle clamp and the electric direct drive injection unit allows for highly functional and diverse moulding.

DIEPREST Multi-step operation screen

DIEPREST

Core back foaming process	C-Mode F-System	Results
	Gap cancellation organization	<ul style="list-style-type: none"> - Weight reduction of the moulded product - Uniform foamed cell size <p>Automotive interior parts</p>
Skin material insert moulding	C-Mode P-Mode	<ul style="list-style-type: none"> - High value-added products - Reduced skin material losses - Reduced manufacturing process <p>Automotive interior parts</p>
	Mould close start Mould open start	
Low pressure moulding	Injection compression mode Injection press mode	Warpage and sink marks reduced, Thin wall moulding, Clamping force reduction, Gas release moulding
Film insert moulding	R-Mode	High value-added products
Sink mark reduced moulding	S-Mode	Sink mark reduction

Tie bar puller system (Optional)

This option applies to over 720HH.

- Easy mould change
- Speedy set up
- Effective production




Five management merits

<p>Fast mould changing</p> <p>Complicated moulds fit in quickly without disassembling.</p>	<p>Larger moulds for smaller machines</p> <p>Large size moulds fit into appropriate clamping force machines.</p>	<p>Easy mould changing</p> <p>Forklifts can be utilized for mould changing.</p>	<p>Utilize factory space</p> <p>Larger machines can be installed in low ceiling factories.</p>	<p>Ideal mould designing</p> <p>There are less constraints in designing.</p>
---	---	--	---	---

DLFT system – Direct Long Fiber reinforced Thermoplastics injection moulding system (Optional)

The DLFT system is an injection moulding system for Long Fiber reinforced Thermoplastics, which allows the direct mixing of the base resin material and the reinforcing fiber material in the barrel. Allows LFT products, which have high strength, lighter weight, and are a suitable substitute for metal parts, to be produced at a lower cost!

Patent registrations: 12
Trademark registrations: 4

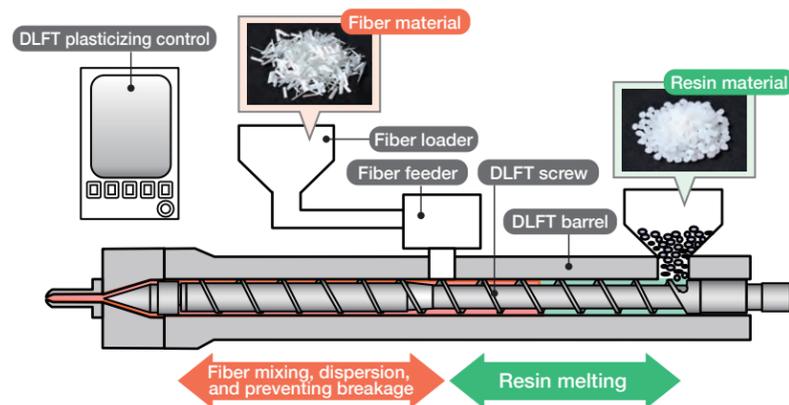

A fusion of the specially developed DLFT screw using an inline screw method together with our plasticizing control technology

- Maintaining fiber length (physical properties)
- Even fiber dispersion (quality)
- Sufficient plasticizing capacity (productivity)
- Easy moulding operation and maintenance with simple screw structure

Cost reduction (Estimation)



Example of automotive parts applications



Specification

Standard Specification

[Injection Unit]

- Injection system
- UB screw
- Check ring
- Barrel
- Nozzle
- Heater/Control
 - Band heater
 - SSR control
 - Temperature monitoring function
 - Rapid convergent temperature control
- Injection control
 - Inj. speed and pressure programmed control (1-16 stages)
 - Holding pressure programmed control (1-4 stages)
 - Holding pressure switching control (position, time, or pressure)
 - Holding pressure slope control
- Screw rotation speed programmed control (3stages)
- Screw back pressure control (3stages)
- Melt decompression circuit (after injection, after plasticizing)
- Nozzle advance/retract control
 - Injection unit swivel device
 - Sprue break circuit (timer system)
- Feed throat cooling water circuit
- Trial moulding circuit (manual injection circuit)
- Auto.color change circuit (Jet purge circuit)
- Hot runner purge circuit (color change circuit for mould)
- Screw cold start prevention circuit
- Shot step circuit
- Plasticizing mould opening and closing lap circuit
- Screw indicator
- Automatic lubrication device (Injection side)
- Barrel cover
- Purge cover

[Clamp Unit]

- Clamp system
- Ejector device
- Automatic mould height adjusting device
- Mould close-open control
 - Mould setting operation circuit
 - Mould close-open speed programmed control (4stage for opening, 4stage for closing)
 - Mould close-open automatic deceleration circuit
 - Mould protection circuit
 - Link motion of ejector and core pull with mould motion
- Ejector control
 - Ejector programmed control (2stage, Max. 8times ejection)
 - Ejector block circuit (w/motor break)
 - Ejector on fly (at any mould opening position)
 - Ejector retract wait motion
- Take-out Robot interface
- Mounting holes for Take-out Robot (Based on EUROMAP)
- Locating ring for mould centering
- Automatic lubrication device (Clamp side)
- Front safety door
 - Manual-operated door (-950HH)
 - Power-operated door (950HHW over)
- Rear door
 - Manual-operated door
- Safety device for mould area (950HHW over)
 - Safety platform
 - Safety confirmation switch in mould area
 - Emergency stop button in mould area
- Mechanical safety device (for delivering to Japan only)

[Hydraulic Unit]

- Hydraulic pump unit (Built-in)
 - 390, 510HH: 1595 psi/5.3 gal/min (60Hz)
 - 610-1500HH(W) : 2030 psi/5.3 gal/min (60Hz)
- Oil temperature gauge
- Hydraulic oil level alarm

[Electric Unit]

- MAC-IX Control device
 - Heater burn-out detector
- Automatic temperature storage for barrel
- Automatic memory for mould condition
 - Internal memory (480 moulds)
 - External memory interface (1008 moulds)
- Data security function
 - RFID card
 - Data protection by multilevel password
 - Setting value change prevention circuit
 - Setting value change history display
- Moulding condition data setting/display function
 - Injection speed/pressure waveform display
 - Screw rotation waveform display
 - Injection speed/pressure waveform memory
 - Process support function (Easy setting condition)
 - Entire setting value display
 - Preset circuit for next moulding condition
 - Unit conversion
 - Foreign language (Displayed language switching, select 3 languages from Japanese, English, Chinese, Spanish, Thai)
- Production management function
 - Production management data input
 - Production monitor
 - Process monitor function
 - Trend data display
 - External signal output circuitII
- Alarm function
 - Operating condition OK monitor
 - Alarm indication
 - Input and output display
 - Alarm buzzer
- Maintenance information
 - Grease supply alarm
 - Lubrication oil supply alarm
 - Battery exchange alarm
 - Alarm history display
 - Operation history display
 - Running hour meter
- Screen shot (Screen image storage)
- Safety/Energy saving function
 - Emergency stop buttons switch
 - Cycle start push button
 - Power supply regeneration function
- Heater subset temperature control
- Automatic heat-up circuit
- Automatic cycle stop circuit
- Material feeding stop signal output
- Production completion pre-notice circuit
- Data maintenance (UPS, lighting surge suppressor)
- Setting value direct input (Actual value/percentage (%) input switching)
- ECO monitor

[Control Unit]

- Injection compression moulding circuit (coining circuit)
- Early decompression circuit

[General]

- Mounting/Leveling pad
- Accessories
 - Specialized tools
 - Spare parts (fuses, grease cartridges)
 - Ejector rod
- Instruction manuals, drawings (one Data CD each)

Option Equipment Specification

[Injection Unit]

- Screw
 - Material
 - Anti-abrasive & anti-corrosive screw
 - Screw type
 - SPIII screw
 - HC-UB screw (above 100DD)
 - MF-UB screw
 - F screw
 - LFT screw
- High-responsive check ring (for low viscosity resin)
- Barrel
 - Anti-abrasive barrel (*US standard)
 - Anti-abrasive & anti-corrosive barrel
- Shut off valve
 - Hydraulic shut off valve (Rotary type)
 - Hydraulic shut off valve (Needle type)
 - Pneumatic shut off valve (Needle type)
- Barrel heater
 - Brass type heater
 - Ceramic type heater
- Barrel cover
 - Insulated heater cover
 - ECO cylinder cover
 - Barrel cover with blower
- Feed throat cooling water circuit
 - Flow meter
 - Temperature control device
 - Cooling water outage alarm
- Melt decompression circuit (after plasticizing, after cooling, both *US standard)
- Hopper stage
 - Ladder type
 - Large floor type
- Hopper (Steel/Stainless)
- Nozzle advance/retract control
 - Sprue break circuit (proximity switch)
 - Nozzle retract stop circuit
- Material shortage detection circuit
- Screw torque up

[Clamp Unit]

- Hydraulic mould ejector (1line)
- Mould ejector retraction confirmation circuit
- Air blow (2 lines)
- Hydraulic core (2, 4 lines)
 - Mould ejector circuit (Hydraulic core)
 - Hydraulic core decompression circuit
 - Hydraulic core cylinder block circuit
- Air core (2 lines)
- Hydraulic valve gate (2, 4 lines)
- Air valve gate (2, 4 lines)
- Ejector/Core link motion inhibition circuit (*US standard)
- Piping for mould cooling water
 - Main piping type
 - Manifold type
- Auto. powered opening device for front safety door (except 950HHW over)
- Power-operated front safety door (950HHW over std.)
- Power-operated rear door
- Safety platform (950HHW over std.)
- Locating ring for easy alignment of mould
- T-slotted mould platen
- Automatic mould clasper interface
- Magnet clasper interface
- T-slotted platens
- Daylight extension (+4.33 in)
- Heat insulation board for mould

[Hydraulic Unit]

- High flow hydraulic pump unit (Built-in) (2030 psi/15.8 gal/min (60Hz) except 390, 510HH)
- Hydraulic oil temperature monitor

[Electric Unit]

- Main breaker
- Earth leakage breaker
- Outlet circuit
 - 100V outlet circuit
 - 200V outlet circuit
- Hot runner control device
- Signal light
 - Red color signal light
 - Three (3) color signal tower
- Recording terminal (injection speed, pressure, position)
- Acceptance check circuit
- Memory data communication with take-out robot
- Ancillary equipment alarm
- Plug switch (located at operation side and anti-operation side)
- Unmanned operation circuit
- Product stocker change circuit
- Air pressure drop alarm

[Control Unit]

- Holding pressure switching control
 - External signal (*US standard)
 - Mold cavity pressure
- Mould cavity pressure monitor
- Mould temperature monitor
- Gate cut circuit
- Rotating core circuit
- Product drop circuit interlock
- Clamp force display circuit
- Automatic clamp force correction circuit
- packet MAC (LAN/USB)
- Production control
 - LINKI

[For Special Moulding]

- SCS moulding circuit
- Gas assist moulding circuit
 - AGI circuit interface
 - Air mould circuit interface
 - Cinpres circuit interface
- Active temperature control system
 - Interface for active temperature control unit
 - Active temperature control circuit
- Core back circuit
- MuCell moulding circuit
- D-LFT system
- Double mould circuit
- DIEPREST moulding system
 - DP-C mode
 - DP-P mode
- Foam moulding system (F-System)

[General]

- Special paint color
- Spare parts for two (2) years
- Spare parts for nozzle heater
- Tools (*US standard)
- Instruction manual, drawings (document file)
- Name plate in foreign language
 - English name plate
 - Chinese name plate
- Oil tank water filling test
- Grease cartridge for spare
- Mounting
 - Foundation bolt
 - Chemical anchor bolt

